


# ArmourShield Pro

ArmourShield Pro is a heavy duty, premium quality loose-lay floor mat that offers excellent shock absorption qualities and exceptional resistance to wear. Available in two thicknesses, 10mm and 17mm, ArmourShield Pro is a virtually indestructible dense rubber mat, used to protect floors and provide insulation for the most demanding applications. The wide ribbed pattern on the reverse allows drainage, whilst the dense rubber textured anti-slip surface, makes ArmourShield Pro the perfect solution for industrial sites, gyms, stables, kennels, livery enclosures, dog grooming areas, golf courses, ice rinks and much more.

## Features

- **Typical applications:** Perfect for areas which need heavy duty, long-lasting matting such as sports facilities, ice skating rinks, horse stables, kennels, livery enclosures, animal grooming areas, agricultural buildings, or industrial sites.
- **Material:** Natural and recycled rubber.
- **Cleaning:** Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended.
- **Sustainability:** Nature friendly, biodegradable and recyclable. REACH compliant. Contributes to a cleaner environment by reducing the need to use cleaning chemicals.
- **Warranty:** Lifetime.

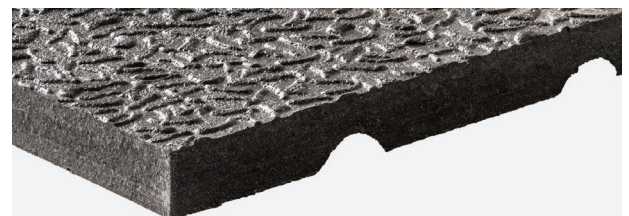

Suitable for use indoor and sheltered areas



Code	Metric	Imperial	Thickness	Weight	Colour
06-0350-1	120cm x 180cm	4' x 6'	10mm	24kg	Black
06-0350-2	120cm x 180cm	4' x 6'	17mm	38kg	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

# ArmourShield Pro

## Technical Specification

Slip resistant:	Great slip resistance to level 2
Anti-fatigue:	Good anti-fatigue properties, resistant to level 1
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Dry area:	Yes
Heavy area:	Yes
Environment:	Suitable for use in indoor and sheltered areas
Impact resistant:	Yes
Product testing:	<ul style="list-style-type: none"><li>■ Tensile strength: 3-3.5 Mpa</li><li>■ Hardness: 55+ Shore A</li><li>■ DIN abrasion loss mm<sup>3</sup>: 250-300</li><li>■ Elongation at break: 200-250%</li></ul>
Sustainability:	<ul style="list-style-type: none"><li>■ Nature friendly, biodegradable and recyclable</li><li>■ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li><li>■ Contributes to a cleaner environment by reducing the need to use cleaning chemicals</li></ul>
Temperature resistance:	-20°C to +130°C
Cleaning:	Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended