


# WideRib Tough

WideRib Tough is a low cost, surface covering suitable for a wide variety of applications. The wide ribbed surface provides excellent grip for both floor surfaces and work areas. It is easy to cut and can be laid loose or glued/ fixed down for a more permanent solution. Available in two different thicknesses: 3mm and 6mm and two widths: 90cm and 120cm, it can be ordered in 10m rolls. WideRib Tough is suitable for medium to heavy duty use.

## Features

- **Typical applications:** Low-cost surface covering, suitable for industrial flooring, aisles, work benches, vehicle interiors, kennels, livery enclosures and animal grooming areas.
- **Material:** 100% rubber.
- **Cleaning:** Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended.
- **Sustainability:** REACH compliant. Contributes to a cleaner environment by reducing the need to use cleaning chemicals.
- **Warranty:** Lifetime.

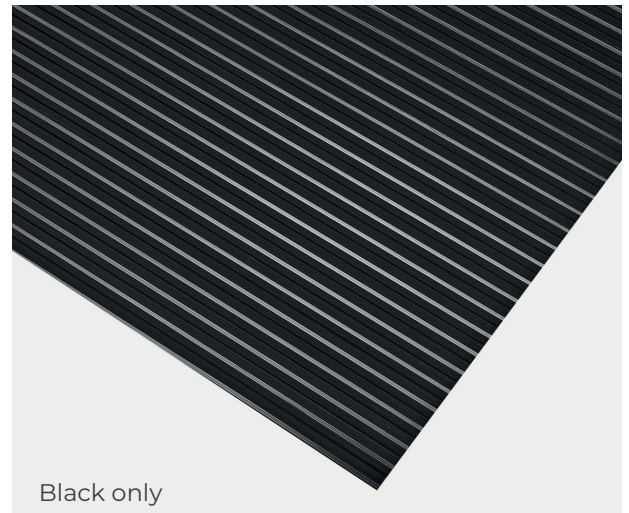

Suitable for indoor and outdoor use

Code	Metric	Imperial	Thickness	Weight	Type	Colour
06-0337-1	90cm x 10m	3' x 33'	3mm	33.75kg	Roll	Black
06-0337-3	90cm x 10m	3' x 33'	6mm	74.25kg	Roll	Black
06-0337-2	120cm x 10m	4' x 33'	3mm	45kg	Roll	Black
06-0337-4	120cm x 10m	4' x 33'	6mm	99kg	Roll	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number  
 Please note, the thickness can be +/- 0.3 to 0.5mm. Roll tolerance - width and length +/- 2%

# WideRib Tough

## Technical Specification

Slip resistant:	Great slip resistance to level 2
Anti-fatigue:	Good anti-fatigue properties, resistant to level 1
Wear resistant:	Great wear resistance to level 2, suitable for medium to high footfall
Cut to length:	Yes, mat can be cut to length
Cut to size:	Yes, mat can be cut to bespoke sizes
Disability friendly:	Yes, the low profile makes it suitable for wheelchair users
Dry area:	Yes
Wheeled area:	Yes, the low profile allows easy access for lightweight wheeled traffic
Impact resistant:	Yes
Environment:	Suitable for indoor and outdoor use
Product testing:	<ul style="list-style-type: none"> <li>▪ Hardness Shore A <math>\pm 5</math> 70° - ISO 7619-1</li> <li>▪ SG (g/cm<sup>2</sup>) 1.5 - ISO 2781</li> <li>▪ Tensile (N/mm<sup>2</sup>) 3.5 - ISO 37</li> <li>▪ Elongation % 300 - ISO 37</li> <li>▪ Compression % 43 - ISO 37</li> <li>▪ Tear Strength 12 - ISO 34-1</li> <li>▪ Abrasion mm<sup>3</sup> 480 - ISO 37</li> </ul>
Sustainability:	<ul style="list-style-type: none"> <li>▪ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li> <li>▪ Contributes to a cleaner environment by reducing the need to use cleaning chemicals</li> </ul>
Temperature resistance:	-20C° to +70C°
Cleaning:	Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended