




## Deckplate

Fatigue relief in demanding environments



- Reduce standing fatigue for workers in industry.
- Dual layer mat provides balance of comfort and wear resistance.
- Hardwearing top surface ensures a long life in normal use.
- Checker plate style design suits industrial environments.
- Self-extinguishing top surface (tested to BS EN 13501-1) provides resilience to many industrial chemicals.
- High visibility version available with bright yellow borders.
- Bevelled edges help avoid creating a trip risk.

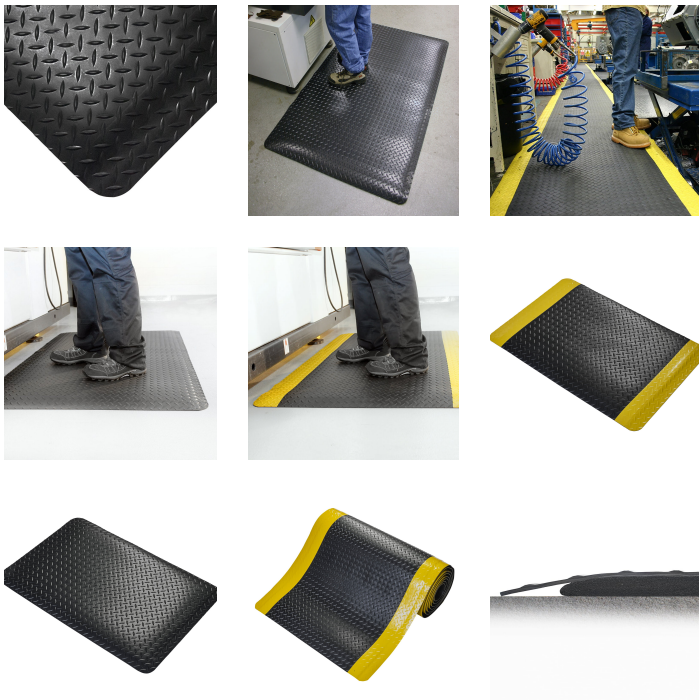

## Styles Available



Standard



Safety

## Parts

Part Number	Size	Colour	Weight (kg)
DP010004	0.6 m x 18.3 m	Black	71.92
DP010004C	0.6 m x per linear metre	Black	3.93
DP010005	0.9 m x 18.3 m	Black	108
DP010005C	0.9 m x per linear metre	Black	8
DP010007	1.2 m x 18.3 m	Black	166
DP010007C	1.2 m x per linear metre	Black	9
DP010011	1.5 m x 15 m	Black	178
DP010011C	1.5 m x per linear metre	Black	9.7
DP010609	0.6 m x 0.9 m	Black	3.54
DP010903	0.9 m x 3 m	Black	17.71
DP010906	0.9 m x 6 m	Black	35.42
DP010915	0.9 m x 1.5 m	Black	8.86
SD010701	0.6 m x 0.9 m	Black/Yellow	4
SD010702	0.9 m x 1.5 m	Black/Yellow	11
SD010703	0.9 m x 3 m	Black/Yellow	22
SD010704	0.9 m x 6 m	Black/Yellow	44
SD010706	0.6 m x 18.3 m	Black/Yellow	93
SD010706C	0.6 m x per linear metre	Black/Yellow	5
SD010707	0.9 m x 18.3 m	Black/Yellow	114
SD010707C	0.9 m x per linear metre	Black/Yellow	8
SD010708	1.2 m x 18.3 m	Black/Yellow	166
SD010708C	1.2 m x per linear metre	Black/Yellow	6
SD010709	1.5 m x 15 m	Black/Yellow	178
SD010709C	1.5 m x per linear metre	Black/Yellow	9.7

## Technical Specifications

<b>Material</b>	Vinyl top surface with PVC foam backing (fusion bonded, not glued)
<b>Surface Finish</b>	Diamond pattern
<b>Product Height</b>	15 mm
<b>Roll Length</b>	18.3 m
<b>Min. Operating Temperature</b>	0°C
<b>Max. Operating Temperature</b>	+60°C
<b>Resistance to Chemicals</b>	The PVC top surface provides limited resistance to chemicals and oils
<b>Environmental Resistance</b>	Suitable for dry indoor environments
<b>Typical Applications</b>	Packing stations, Assembly areas, Production lines where regular turning occurs
<b>Installation Method</b>	Loose lay
<b>Cleaning Method</b>	Brush/mop the top surface
<b>Fire Tested to</b>	BS EN 13501-1 Class Cfl - s1
<b>COO (Country of Origin)</b>	CN
<b>Guarantee</b>	3 years when used in a dry environment

## Additional Information



Deckplate EN ISO 9239 Fire Test



Deckplate EN ISO 11925 Fire Test



Deckplate BS EN 13501 Fire Test

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email [sales@cobaeurope.com](mailto:sales@cobaeurope.com)

[www.cobaeurope.com](http://www.cobaeurope.com)